智光电气
Zhiguang Electric

ZINVERT 智能高压变频调速系统产品手册

ZINVERT Intelligent High-voltage Variable Frequency Device Product Brochure

广州智光电气技术有限公司
Guangzhou Zhiguang Electric Technology Co., Ltd.

Company Introduction

PCS (SVG) / UPS

Guangzhou Zhiguang Electric Technology Co., Ltd. is a core member enterprise of Guangzhou Zhiguang Electric Co., Ltd. specializing in the research of flexible power technology in the strategic development direction of integrated energy technology and services.

Since its establishment, the company has been focusing on the research of electrical control equipment technology with high-power power electronics as the core technology, and has carried out technological research and industrial application in the fields of smart grid, distributed microgrid, energy storage, motor control and energy conservation, power quality control, advanced power supply technology, etc. The main products include neutral point grounding devices for distribution networks, high-voltage variable frequency speed regulation devices, energy storage PCS systems, static var generators (SVG), port shore power systems, high/low-voltage power quality management, and large industrial intelligent UPS, etc.

Enterprise Vision

“ ”

An Expert in Technological Innovation of High-power Electronics.

Enterprise Mission

“ ”

To Help Customers Use Energy Safely, E ciently and Comfortably.

Establishment Time: 2002	Registered Capital: 200 million yuan	Wholly-owned subsidiary of Zhiguang Electric Co., Ltd.	More than 300 patents and honorary qualifications

1.1

2006

2007

7MVA/10MVA

2008

10MVA

2009

50

1000MW

2010

4700kW/6kV
600MW

2011

10MVA
-

2018

3300V IGBT

·1300A

2019

2020

2005 2020

2021

2022

“ ”

2023

·IGCT

Product Introduction

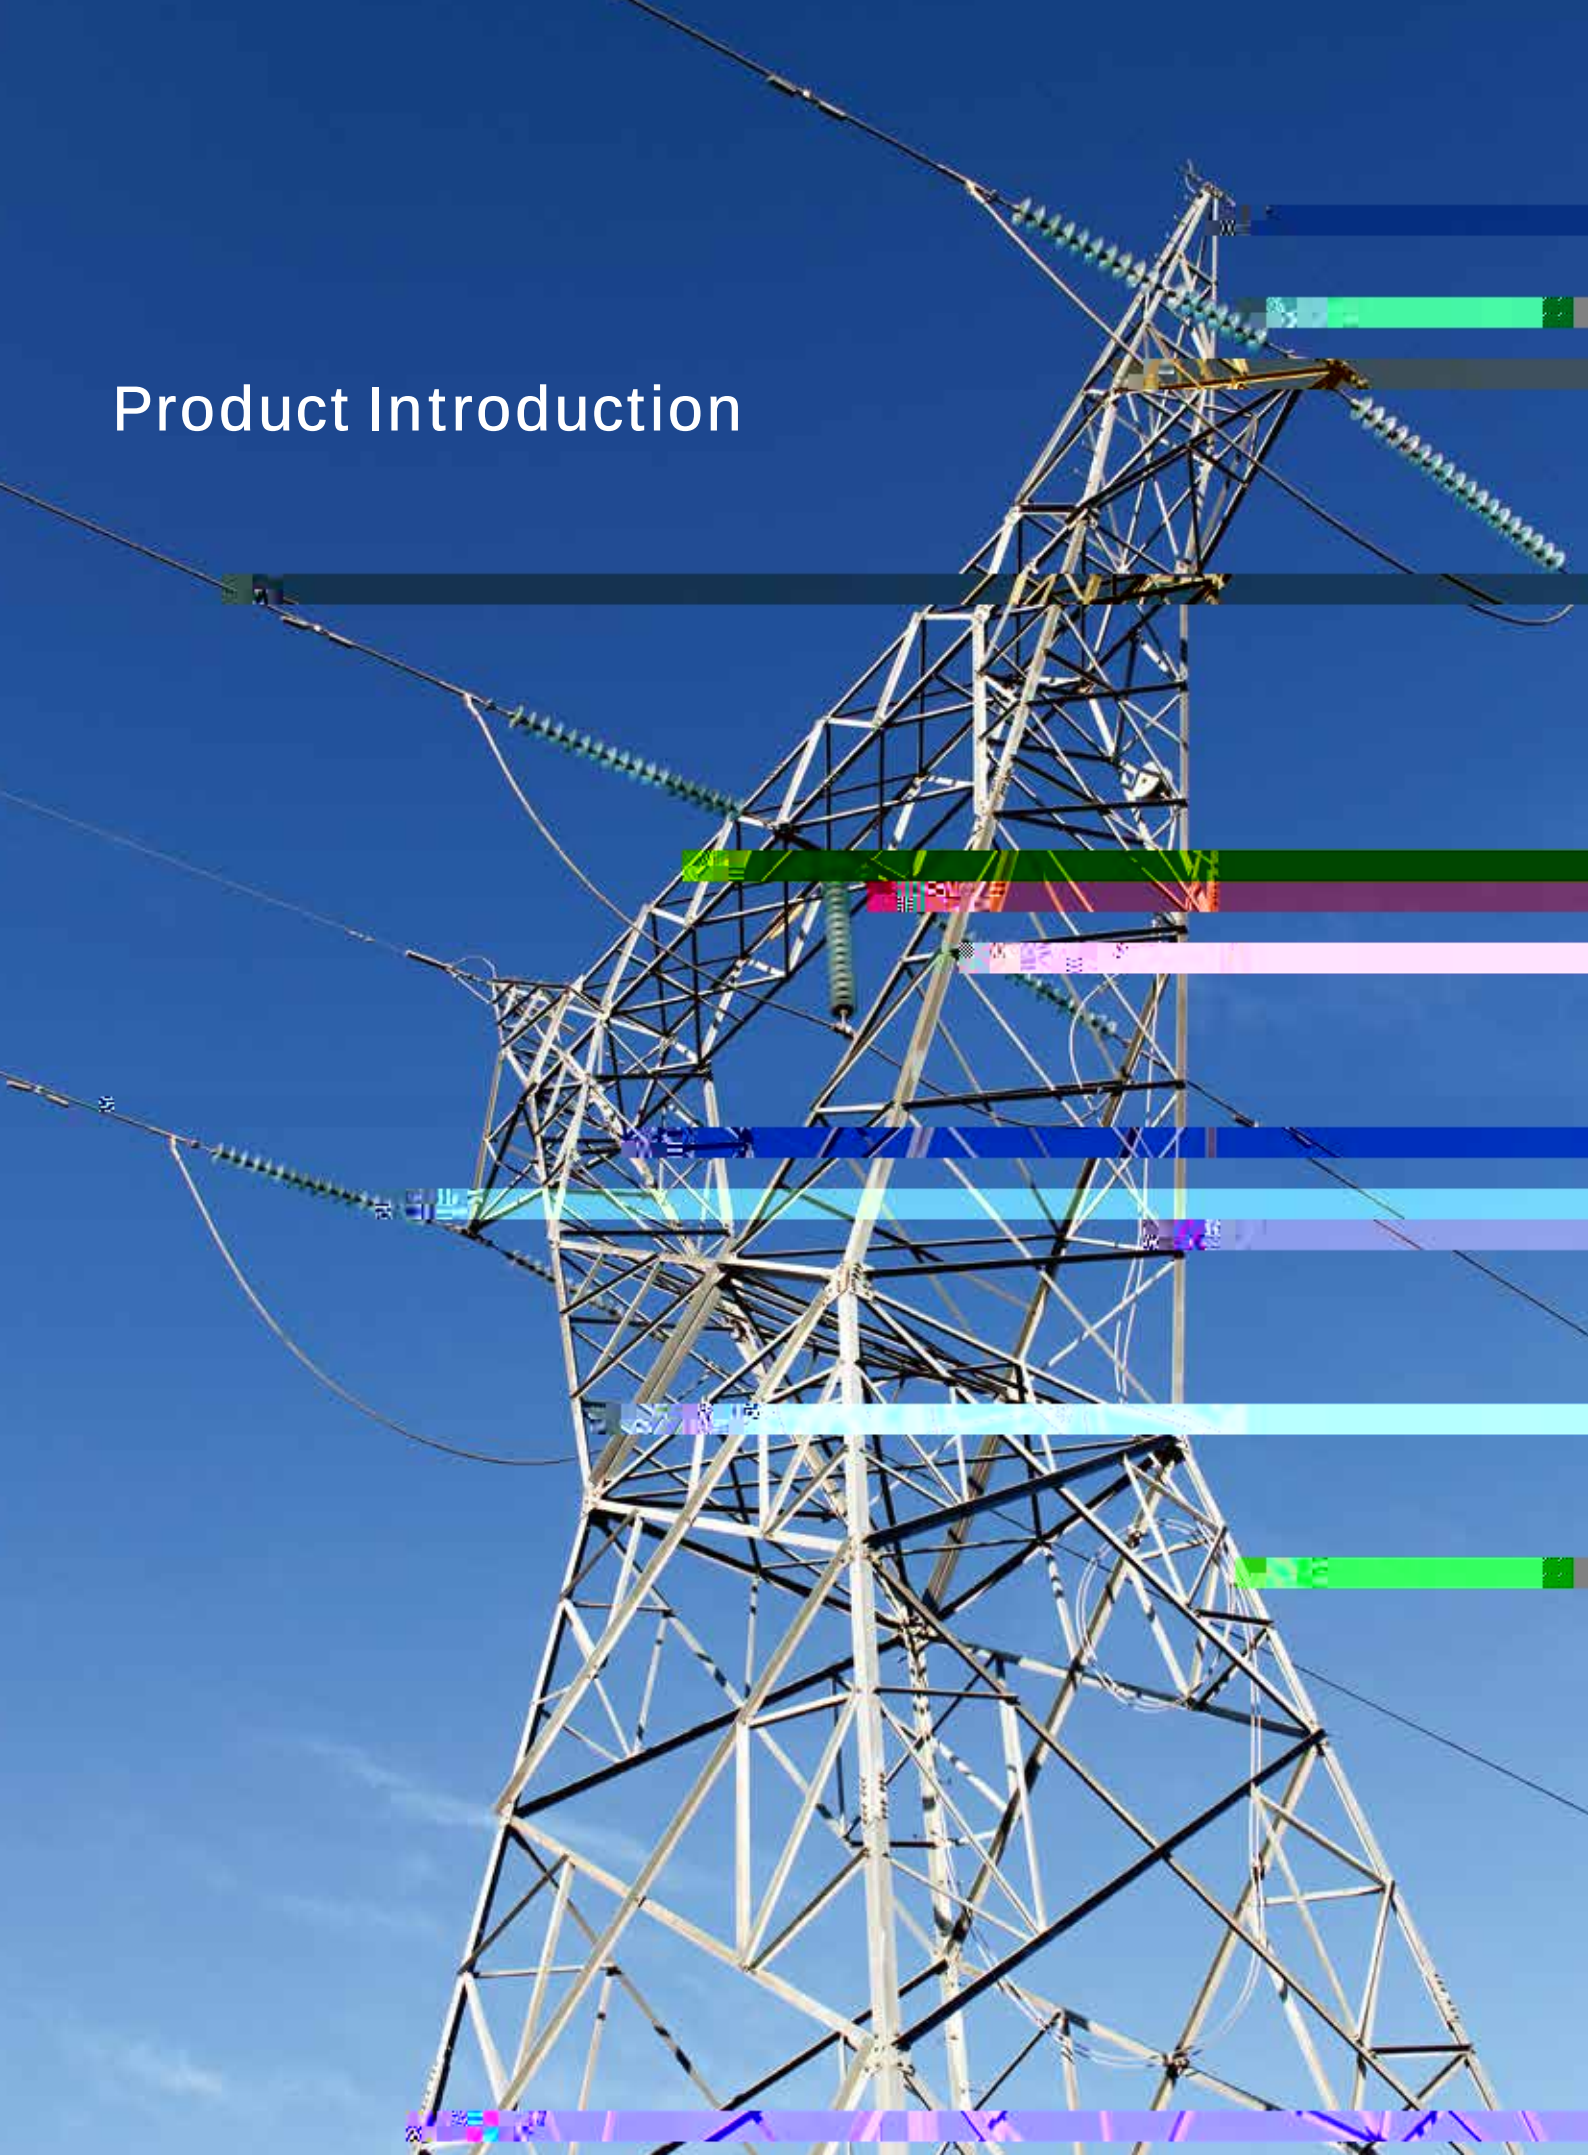

2.1 ZINVERT

ZINVERT Intelligent High-voltage Variable Frequency Device(HVFD Introduction

ZINVERT 10kV 6kV

-

HVFD through the phase shifting transformer on the input 10kV or 6kV voltage after phase shifting step-down, by the power unit

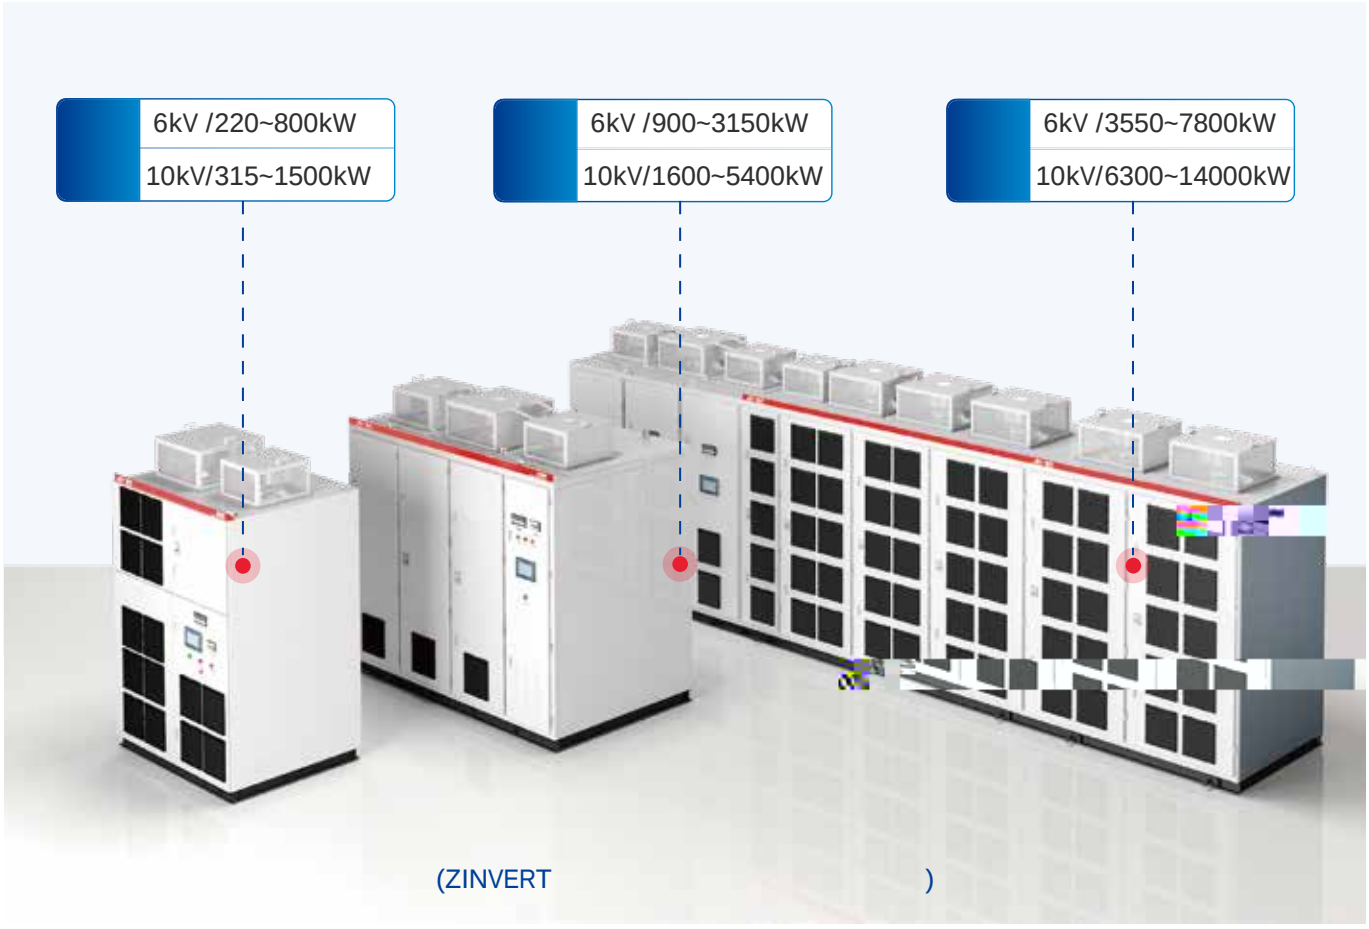

(ZINVERT)

2.2 ZINVERT

HVFD Eight Advantages

Superior high and low voltage ride-through technology

65 115 Ue 60s

It does not shut down in the range of 65% to 115% Ue fluctuation of the grid-side voltage, and within 60s of the grid-side voltage dropout, it starts by itself without shock and drags the motor to the state before the power dropout.

“ STT ”

Direct starting of rotating loads with proprietary "STT" technology

“ STT ”

Adopting the original "STT" algorithm, it ensures that the motor can be started without stopping at any speed within the speed range, and can be started directly without impact, which has been verified by the test of the national organisations.

“ SCP ”

High-voltage output sudden short-circuit "SCP" protection technology

“ SPC ” Adopting the patented "SPC" protection technology with multiple short-circuit protection functions, it can e ectively protect the safety of the motor and the system.

Separate power supply technology for transformers with high short-circuit insulation impedance

Low-voltage debugging mode enables convenient debugging and easy problem troubleshooting, shortens the debugging cycle, and improves reliability.

Adaptive acceleration and deceleration adjustment

Improve the short-circuit resistance of the transformer, guarantee the stability of the power supply of the unit, reduce the losses generated by daily operation, and save energy and increase e ciency.

Unique cooling structure adapts to air-cooled and water-cooled flexible design

Adopting special structural design, high heat dissipation e ciency, small system volume, low requirements for temperature, humidity, dust, gas and other environmental requirements, air-cooled, water-cooled to meet the needs of customers in multiple scenarios.

Low power sensitivity and high operational stability

Adopt three-way power supply circuit design, low sensitivity to power supply. Adopt software and hardware multiple anti-interference technology to ensure the stability of system operation.

The whole machine is self-developed and produced to ensure quality and cost competitiveness.

Based on Zhiguang's many years of high-power electronics technology and patented technology, self-developed and produced of power units, phase-shifting transformers, control systems and other core components, to ensure product quality and cost advantages.

0.1 10Hz

/ / 16 1 5

RS232 RS485 RJ45

0.1% ± 2%

>97% rated >96% 20% >20% rated

0~10%Un configurable

0 3000s configurable

0.1 30s)

PLC PID /

IGBT

<75dB all

	5000m 1200 1200-5000
/	-5~+45 20~95%
	10~150HZ 0.5g
	-20~70

2.4 Business Models

2.4.1 Application Scenarios

Thermal power generation: induced draft fan, supply fan, dust-absorbing fan, booster fan, compressor, condensate pump, feed water pump, make-up water pump, grey slurry pump, and so on.

Cement manufacturing: kiln head exhaust fan, kiln tail exhaust fan, high-temperature fan, main dust-absorbing fan, cooler dust-absorbing fan, cooler exhaust fan, preheating tower fan, sorter fan, etc.

Metallurgy: main extractor fan, blast furnace blower, dust removal fan, slurry pump, descaling pump, centrifugal feed pump, elevator, semi-automatic mill, etc.

Mines: Main ventilation fans, pressurised fans, extractor fans, air compressors, pumps, belt conveyors, mills, etc.

Municipalities: sewage pumps, clean water pumps, purification pumps, biological crude treatment tower pumps, oxygen delivery blowers, etc.

Papermaking: pulper, grinder, pulveriser, papermaking machine, rewinder, etc.

Petrochemical: induced draft fan, gas compressor, water injection pump, submersible oil pump, main pipeline pressurised pump, boiler feed pump, brine pump, mixer, squeezer, etc.

Others: Synchronous belt drive mechanical devices, mine hoist, wind turbine, energy return laboratory, drag control, wind tunnel, rubber, military and other industries.

▸ 10kV

10kV HVFD Selection Table

NO.	Motor Capacity (kW)	Inverter Model	A Rated output current	Total Length		Height (mm)	Total Depth (mm)	kg Total Weight	
				Manual	Automatic			Manual	Automatic
1	315	Zinvert-A8H400/10	30	2400	3000	2810	1384	2670	2970
2	355	Zinvert-A8H450/10	30	2400	3000	2810	1384	2720	3020
3	400	Zinvert-A8H500/10	30	2400	3000	2810	1384	2770	3070
4	450	Zinvert-A8H560/10	36	2400	3000	2810	1384	2867	3167
5	500	Zinvert-A8H630/10	36	2400	3000	2810	1384	2967	3267
6	560	Zinvert-A8H700/10	50	2400	3000	2810	1384	3067	3367
7	630	Zinvert-A8H800/10	50	2400	3000	2810	1384	3117	3417
8	710	Zinvert-A8H900/10	60	2400	3000	2810	1384	3284	3584
9	800	Zinvert-A8H1000/10	60	2400	3000	2810	1384	3384	3684
10	900	Zinvert-A8H1150/10	75	2400	3000	2810	1384	4098	4398
11	1000	Zinvert-A8H1250/10	75	2400	3000	2810	1384	4348	4648
12	1120	Zinvert-A8H1400/10	105	2400	3000	2810	1384	4455	4755
13	1250	Zinvert-A8H1500/10	105	2400	3000	2810	1384	4545	4845
14	1400	Zinvert-A8H1750/10	105	2400	3000	2810	1384	4745	5045
15	1500	Zinvert-A8H1800/10	105	2400	3000	2810	1384	5050	5350
16	1600	Zinvert-A8H2000/10	120	3400	4000	2675	1695	5340	5726
17	1800	Zinvert-A8H2250/10	150	3400	4000	2675	1695	5840	6226
18	2000	Zinvert-A8H2500/10	150	3400	4000	2675	1695	6206	6530
19	2250	Zinvert-A8H2800/10	180	3400	4000	2675	1695	6530	6960
20	2500	Zinvert-A8H3100/10	180	3400	4000	2675	1386	8654	8954
21	2800	Zinvert-A8H3500/10	216	5700	6300	2675	1386	9428	9728
22	3000	Zinvert-A8H3750/10	216	5700	6300	2675	1386	9928	10228
23	3150	Zinvert-A8H4000/10	250	5700	6300	2675	1386	10144	10444
24	3550	Zinvert-A8H4500/10	250	5900	6500	2675	1386	10814	11114
25	4000	Zinvert-A8H5000/10	270	5900	6500	2675	1386	12158	12458
21	4500	Zinvert-A8H5600/10	300	5900	6500	2710	1386	12959	13259
22	5000	Zinvert-A8H6300/10	360	6100	6700	2910	1386	13358	13658
23	5400	Zinvert-A8H6750/10	400	6100	6700	2910	1386	14358	14658
24	6300	Zinvert-A8H7800/10	480	9680	10280	2910	1586	16027	16327
25	7200	Zinvert-A8H8900/10	540	11400	13000	2910	1586	18960	20460
26	8000	Zinvert-A8H10000/10	600	11400	13000	2910	1586	22930	24430
27	9000	Zinvert-A8H11250/10	720	11400	13000	2910	1586	24130	25630
28	10000	Zinvert-A8H12500/10	720	11400	13000	2910	1586	25830	27330
29	11200	Zinvert-A8H14000/10	810	14400	16000	2910	1586	25830	27330
30	12500	Zinvert-A8H15500/10	900	14400	16000	2910	1586	27430	28130
31	14000	Zinvert-A8H17500/10	1050	15210	16810	2910	1586	32630	31130

▸ 6kV 6kV HVFD Selection Table

NO.	Motor Capacity (kW)	Inverter Model	A Rated output current	Total Length		Height	Total Depth	kg Total Weight	
				Manual	Automatic	(mm)	(mm)	Manual	Automatic
1	220	Zinvert-A6H280/06	30	2400	3000	2810	1384	2370	2670
2	250	Zinvert-A6H315/06	30	2400	3000	2810	1384	2370	2670
3	280	Zinvert-A6H350/06	35	2400	3000	2810	1384	2440	2740
4	315	Zinvert-A6H400/06	50	2400	3000	2810	1384	2524	2824
5	355	Zinvert-A6H450/06	50	2400	3000	2810	1384	2664	2964
6	400	Zinvert-A6H500/06	50	2400	3000	2810	1384	2831	3131
7	450	Zinvert-A6H560/06	60	2400	3000	2810	1384	2911	3211
8	500	Zinvert-A6H630/06	60	2400	3000	2810	1384	3281	3581
9	560	Zinvert-A6H700/06	75	2400	3000	2810	1384	3348	3648
10	630	Zinvert-A6H800/10	105	2400	3000	2810	1384	3445	3745
11	710	Zinvert-A6H900/10	105	2400	3000	2810	1384	3545	3845
12	800	Zinvert-A6H1000/10	105	2400	3000	2810	1384	3765	4065
13	900	Zinvert-A5H1150/06	120	3000	3600	2675	1695	6106	6486
14	1000	Zinvert-A5H1250/06	120	3000	3600	2675	1695	6586	6966
15	1120	Zinvert-A5H1400/06	150	3000	3600	2675	1695	6766	7146
16	1250	Zinvert-A5H1550/06	150	3000	3600	2675	1695	6766	7146
17	1400	Zinvert-A5H1800/06	180	3000	3600	2675	1695	6766	7146
18	1600	Zinvert-A5H2000/06	216.5	3800	4400	2675	1586	5930	6230
19	1800	Zinvert-A5H2250/06	216.5	3800	4400	2675	1586	6430	6730
20	2000	Zinvert-A5H2500/06	250	3800	4400	2675	1586	6684	6984
21	2250	Zinvert-A5H2800/06	270	3900	4500	2710	1600	8105	8114
22	2500	Zinvert-A5H3150/06	300	3900	4500	2710	1600	8650	8704
23	2800	Zinvert-A5H3500/06	400	3900	4500	2710	1600	9023	9323
24	3150	Zinvert-A5H4000/06	400	3900	4500	2710	1600	9660	9960
25	2250	Zinvert-A6H2800/06	270	3900	4500	2710	1600	8105	8114
26	2500	Zinvert-A6H3150/06	300	3900	4500	2710	1600	8650	8704
27	2800	Zinvert-A6H3500/06	400	3900	4500	2710	1600	9023	9323
28	3150	Zinvert-A6H4000/06	400	3900	4500	2710	1600	9660	9960
29	3550	Zinvert-A6H4500/06	480	8000	8600	2910	1586	11614	11914
30		Zinvert-A5H4500/06		8000	8600	2910	1586	11155	11455
31	4000	Zinvert-A6H5000/06	480	8000	8600	2910	1586	12114	12414
32		Zinvert-A5H5000/06		8000	8600	2910	1586	11655	11955
33	4500	Zinvert-A6H5600/06	540	9200	10800	2910	1586	13776	15276
34		Zinvert-A5H5600/06		9200	10800	2910	1586	13317	14817
35	5000	Zinvert-A6H6300/06	600	9400	10800	2910	1586	15438	16938
36		Zinvert-A5H6300/06		9400	10800	2910	1586	14979	16479
37	5600	Zinvert-A6H7000/06	720	9400	11000	2910	1586	15438	16938
38		Zinvert-A5H7000/06		9400	10800	2910	1586	14979	16479
39	6300	Zinvert-A6H8000/06	800	11000	12600	2910	1586	20850	22350
40		Zinvert-A5H8000/06		11000	12600	2910	1586	20250	21750
41	7100	Zinvert-A6H9000/06	900	11000	12600	2910	1586	21650	23150
42	7800	Zinvert-A6H10000/06	1050	13000	14600	2910	1586	23950	25450

▸ 3kV 3kV HVFD Selection Table

NO.	Motor Capacity (kW)	Inverter Model	A Rated output current	Total Length		Height (mm)	Total Depth (mm)	kg Total Weight	
				Manual	Automatic			Manual	Automatic
1	250	Zinvert-A3H315/03	60	2600	3200	2675	1586	2010	2310
2	315	Zinvert-A3H400/03	75	2950	3550	2675	1586	2262	2562
3	355	Zinvert-A3H450/03	105	2950	3550	2675	1586	2502	2802
4	400	Zinvert-A3H500/03	105	2950	3550	2675	1586	2563	2863
5	450	Zinvert-A3H560/03	105	2950	3550	2675	1586	2643	2943
6	500	Zinvert-A3H630/03	120	2950	3550	2675	1586	2713	3013
7	560	Zinvert-A3H700/03	150	2950	3550	2675	1586	2844	3144
8	630	Zinvert-A3H800/03	150	2950	3550	2675	1586	2935	3235
9	710	Zinvert-A3H900/03	180	2950	3550	2675	1586	3035	3335
10	800	Zinvert-A3H1000/03	210	2950	3550	2675	1586	3255	3555
11	900	Zinvert-A3H1150/03	245	2950	3550	2675	1586	3591	3891
12	1000	Zinvert-A3H1250/03	245	2950	3550	2675	1586	3841	4141
13	1120	Zinvert-A4H1400/03	270	4800	5400	2675	1200	4386	4686
14	1250	Zinvert-A4H1550/03	300	4800	5400	2675	1200	4586	4886
15	1400	Zinvert-A4H1800/03	360	4800	5400	2675	1200	4999	5299
16	1600	Zinvert-A4H2000/03	400	4800	5400	2675	1200	5598	5898
17	1800	Zinvert-A4H2250/03	480	6680	7280	2675	1586	6898	7198
18	2000	Zinvert-A4H2500/03	480	6680	7280	2675	1586	7198	7498
19	2250	Zinvert-A4H2800/03	540	7200	7800	2710	1586	7623	7632
20	2500	Zinvert-A4H3150/03	600	7200	7800	2710	1586	8123	8177
21	2800	Zinvert-A4H3500/03	720	7200	7800	2710	1586	8323	8623
22	3150	Zinvert-A4H4000/03	800	7200	7800	2710	1586	8623	8923

▸ Ultra-large capacity HVFD Selection Table

NO.	Transformer Capacity (kVA)	Inverter Model	A Rated unit current output	Unit configuration
1	20000	Zinvert-S4H20000/10F	1150	ZINVU-1150/45F-175D-C1
2	25000	Zinvert-S4H25000/10F	1450	ZINVU-1450/45F-175D-C1
3	30000	Zinvert-S4H30000/10F	1750	ZINVU-1750/45F-175D-C1
4	40000	Zinvert-S4H40000/10F	2300	ZINVU-2300/45F-175D-C1
5	50000	Zinvert-S4H50000/10F	2900	ZINVU-2900/45F-175D-C1
6	60000	Zinvert-S4H60000/10F	3500	ZINVU-3500/45F-175D-C1
7	12000	Zinvert-S2H12000/06F	1150	ZINVU-1150/45F-175D-C1
8	15000	Zinvert-S2H15000/06F	1450	ZINVU-1450/45F-175D-C1
9	18200	Zinvert-S2H18200/06F	1750	ZINVU-1750/45F-175D-C1
10	24000	Zinvert-S2H24000/06F	2300	ZINVU-2300/45F-175D-C1
11	30000	Zinvert-S2H30000/06F	2900	ZINVU-2900/45F-175D-C1
12	36400	Zinvert-S2H36400/06F	3500	ZINVU-3500/45F-175D-C1
13	6000	Zinvert-S1H6000/03F	1150	ZINVU-1150/45F-175D-C1
14	7500	Zinvert-S1H7500/03F	1450	ZINVU-1450/45F-175D-C1
15	9000	Zinvert-S1H9000/03F	1750	ZINVU-1750/45F-175D-C1
16	12000	Zinvert-S1H12000/03F	2300	ZINVU-2300/45F-175D-C1
17	15000	Zinvert-S1H15000/03F	2900	ZINVU-2900/45F-175D-C1
18	18000	Zinvert-S1H18000/03F	3500	ZINVU-3500/45F-175D-C1

3.2 Typical Performance

NO.	Contract	Device Model	Motor power	load	Industry	runtime
1	100MW	Zinvert-S9H18000/10	15000			2025
2	100MW	Zinvert-S9H18000/10	15000			2025
3	LNG	Zinvert-A9H16500/10	13200			2025
4	LNG	Zinvert-R8H13200/10	13200			2025
5	LNG	Zinvert-A9H16250/10Y	13000			2024
6	LNG	Zinvert-R8H13000/10Y	13000			2024
7		Zinvert-R8H11000/10Y	11000			2023
8		ZGMVS-10/14000	10600			2024
9		ZGMVS-10/14000	10600			2024
10		Zinvert-R8H5600/10Y	10500			2022
11		Zinvert-R8H8700/10Y	8700			2023
12		Zinvert-A8H11250/10Y	8500			2024
13		Zinvert-S10H12500/10Y	8000			2022
14		Zinvert-A8H10000/10	7600			2024
15		ZGMVS-10/8900	7200			2022
16		Zinvert-A8H8900/10Y	7100			2025
17		Zinvert-A8H8900/10Y	6900			2022
18		Zinvert-A8H7800/10	6300			2024
19	3#	Zinvert-A6H7800/06Y	6300			2014
20	#3	Zinvert-A6H6900/06Y	6000			2016
21	SJ15000	Zinvert-S8H6750/10Y	5800			2019
22		Zinvert-A6H7000/06Y	5600			2015
23	4#	Zinvert-A6H6900/06Y	5500	/		2015
24		Zinvert-A6H6300/06Y	5200			2019
25		Zinvert-A9H7000/10Y	5000			2019
26	3#	Zinvert-A8H5600/10Y	4300			2020
27		Zinvert-R8H5000/10Y	3400			2022
28		Zinvert-A8H3150/10Y	2500			2020
29		Zinvert-A8H1250/10B	800			2016
30		Zinvert-A8H450/10B	355			2017
			20000			

3.3 Typical Applications

LNG

Zinvert-R8H11000/10Y

LNG

LNG

LNG LNG

Project Name: Inverter Project for the Natural Gas Storage and Peak Regulation of Jingbian by Yanchang Petroleum and the Supporting LNG Configuration
Product Specification: Zinvert-R8H11000/10Y
Project Highlights: The working conditions of natural gas storage and peak regulation as well as LNG production are complex and changeable, and this device endows the system with a powerful adjustment capability. In terms of natural gas storage and peak regulation, it can quickly adjust the operating parameters of the compressor according to the gas consumption peaks and valleys in di erent seasons and at di erent times of the day and night, so as to achieve precise gas storage and e cient gas supply. In the LNG production process, it can timely adjust the motor speed in response to the slight changes in process parameters such as the refrigeration temperature and pressure, ensuring that LNG production is always in the best state and flexibly meeting the diverse demands of the market for natural gas and LNG products.

600MW

Project name: Datang Group 600MW unit combined induced draft fan frequency conversion transformation project
Application scenario: thermal power generation induced draft fan
Project highlights: After the transformation, the frequency conversion equipment operates stably, has good regulation characteristics, and the energy-saving e ect is obvious.

▸

4800

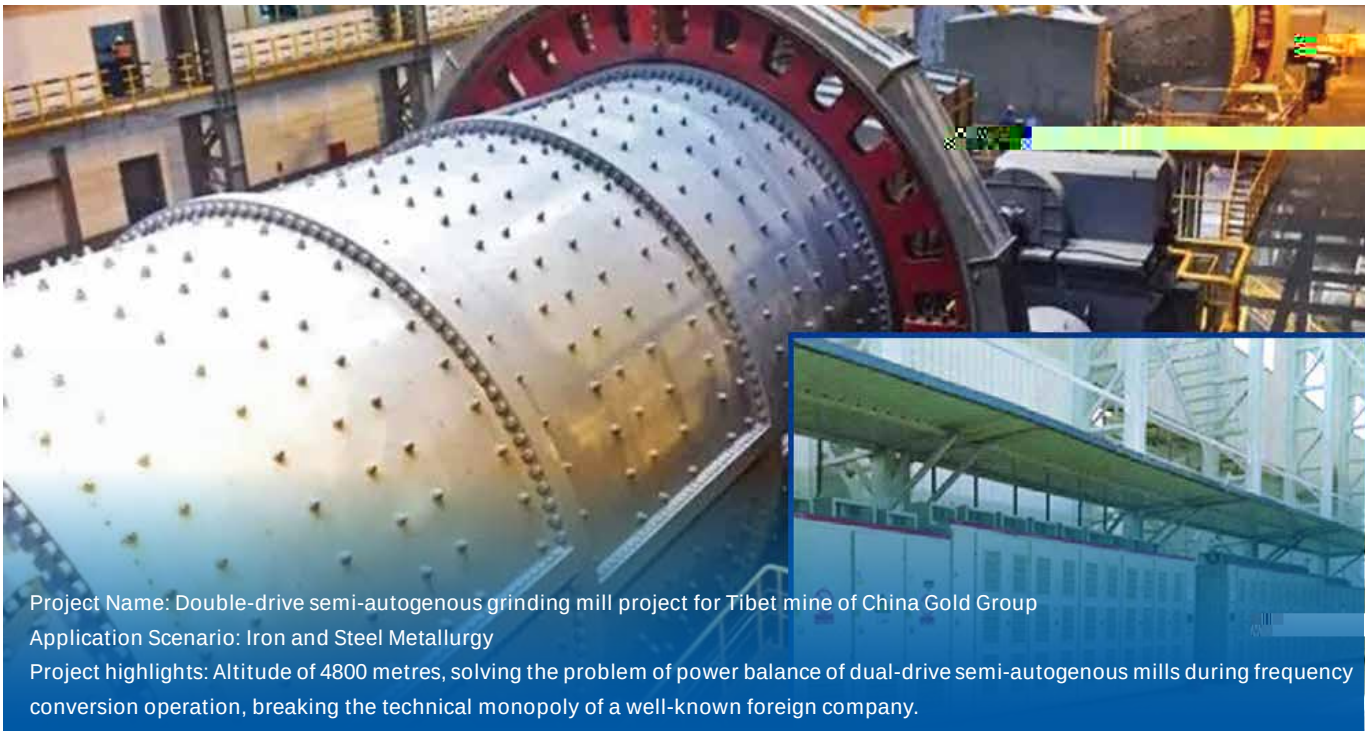

Project Name: Double-drive semi-autogenous grinding mill project for Tibet mine of China Gold Group
Application Scenario: Iron and Steel Metallurgy
Project highlights: Altitude of 4800 metres, solving the problem of power balance of dual-drive semi-autogenous mills during frequency conversion operation, breaking the technical monopoly of a well-known foreign company.

▸ 600MW

6500h 75% 25% 2000

1%

Project name: Datang Group thermal power plant 600MW unit electric feedwater pump frequency conversion transformation project
Application Scenario: Thermal power generation feedwater pump
Project highlights: Under the premise that the unit runs for 6500h and the average load rate is 75%, the comprehensive power saving rate can be up to 25%, and it is expected that the average annual power saving will be over 20 million kWh, and the comprehensive plant power rate will be reduced by nearly 1%.

▶ “ ”

Project Name:Nation's First! Successful Operation of Zhiguang's "One-to-Nine" High-Voltage Frequency Conversion Project
Application Scenario: Thermal Power Plant Fans
Project Highlights:The successful operation of this project has overcome numerous technical challenges faced by high-voltage frequency converters in a one-to-many configuration, such as motor matching, protection, wiring layout, and length. It not only optimizes the operational e ciency of the fans but also reduces energy consumption and maintenance costs, enhancing the system's stability and safety.

▶

20000kVA 150 250

Project name: Guangxi large-scale paper-making enterprise synchronous motor special converter drive pulp mill project
Application Scenario: Pulp Mill for Paper Making Industry
Project highlights: 20000kVA motor, using Zhiguang high-voltage inverter one-two start-up solution, can achieve an annual output of 1.5 million tons of raw pulp and 2.5 million tons of paper.

▸ 2 × 460MW “ ”

18 42 kWh 548.6 GJ

Project Name: Guangzhou Development Zone 2 × 460MW Gas-to-Coal Cogeneration Project
Application Scenario: Thermal power generation
Project Overview: This project adopts 18 sets of inverter by Zhiguang, with an annual power generation of 4.2 billion kWh after commissioning and an estimated annual heat supply of 5.486 million GJ, providing a stable heat source for many enterprises in Guangzhou Science City and the eastern and western districts of the Economic and Technological Development Zone, as well as Dongguan Mayong and other places.

▸

600

3#1780m3

Project name: DXN Iron and Steel Blast Furnace Project Frequency Conversion Modification Project
Application Scenario: Metallurgy
Project highlights After the completion of the project, the annual iron production of the Ironmaking Division will be increased to 6 million tonnes, and DXN Iron & Steel will become the No.1 iron and steel enterprise in Southeast Asia, and Zhiguang Electric high-voltage frequency converter will vigorously assist the construction of the DXN Iron & Steel 3#1780m3 Blast Furnace Project.

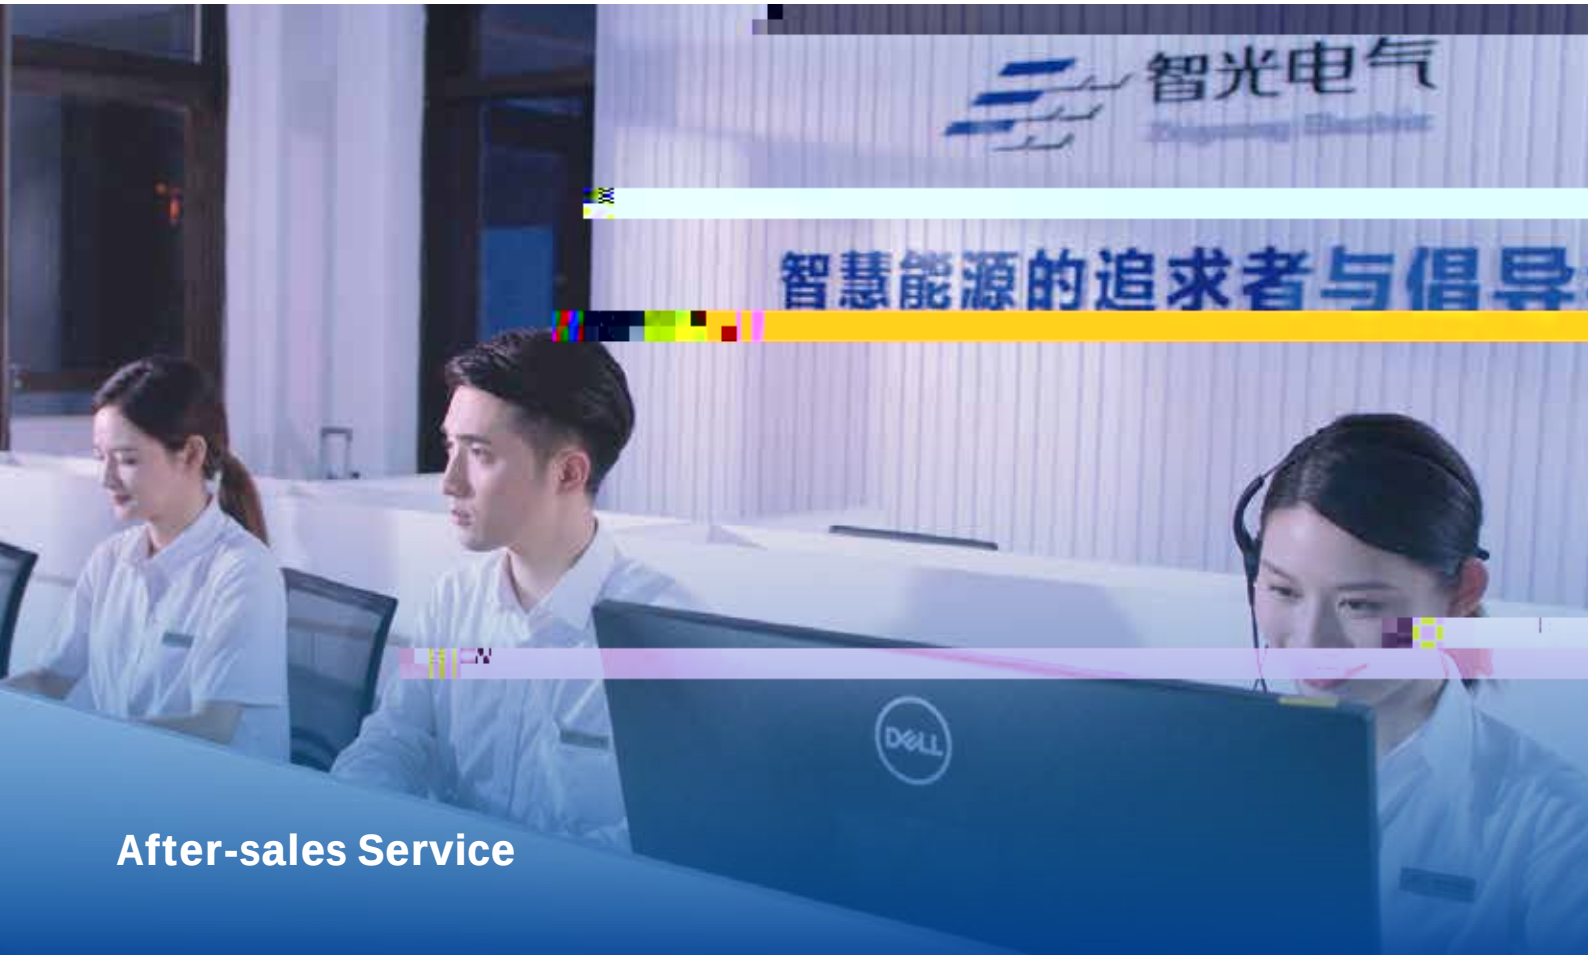

After-sales Service

Five-star after-sales service to ensure the stable operation of equipment in various scenarios around the world.

Professional E cient Comprehensive

002169

Guangzhou Zhiguang Electric Technology Co., Ltd.

Add 51
NO.51 Punan Road,Yunpu Industry Zone, Huangpu District Guangzhou,P.R.China.
Tel 020-32113398
Fax 020-32113456
Web www.gzzg.com.cn
Zip 510760